
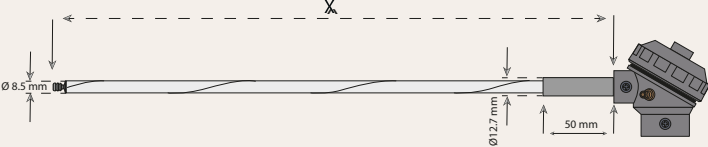

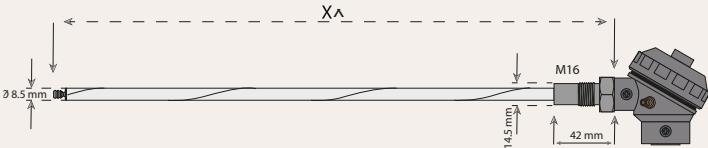

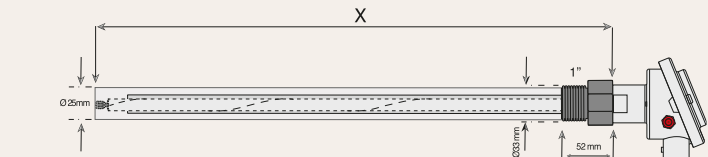

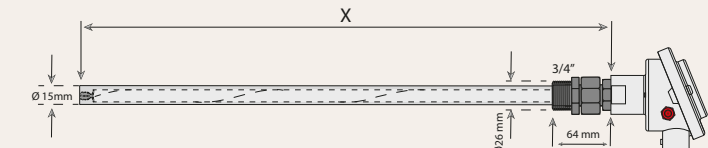

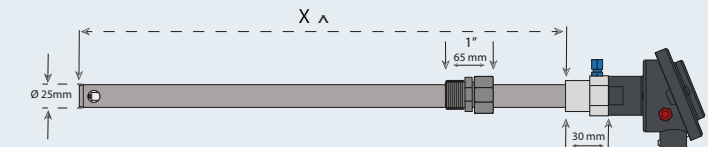

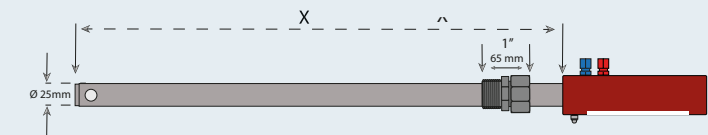

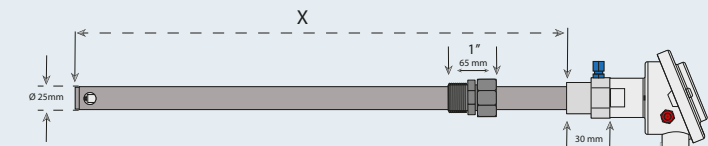

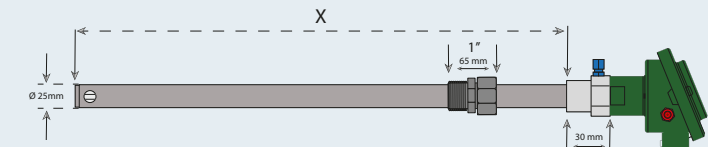


Products comparison

Comparaison de produits
Produktvergleich

info@econox.ch
econox.ch
T +41 32 465 10 00

econox
SWISS QUALITY SINCE 1984
Measuring & control systems Carbon & Oxygen

<p>%O₂</p>	<p>CarboProbeCP</p> 	
<p>%O₂</p>	<p>CarboProbeDS</p> 	
<p>%O₂</p>	<p>CarboProbe HT PRO <i>with enhanced ceramic Sheath</i></p> 	
<p>%O₂</p>	<p>CarboProbe HT <i>with ceramic Sheath</i></p> 	
<p>%C</p>	<p>CarboProbeZS Pro</p> 	
<p>%C</p>	<p>CarboProbeZI Pro</p> 	
<p>%C</p>	<p>CarboProbeST-E</p> 	
<p>%C</p>	<p>CarboProbeIP-E</p> 	

Outer diameter sensor Diamètre extérieur Sensor Außendurchmesser	Minimum temperatur Température minimale Mindesttemperatur	Maximum temperature Température maximale Höchsttemperatur	Maximum length Longueur maximale Maximale Länge	Thermocouple Thermocouple Thermoelement	Connection Connection Verbindung	4-pin electrical connector Connecteur électrique 4-pin 4-poliger elektrischer Anschluss	Voltmeter included Voltmètre inclus Spannungsmesser im Lieferumfang enthalten	Continuous operation Opération en continu Fortlaufender Betrieb	Potters/ceramic industry Potiers/industrie céramique Töpfereien/Keramikindustrie	Laboratories/universities Laboratoires/universités Labors/Universitäten	Industrial furnaces / Incinerators Fours industriels / Incinérateurs Industrieöfen / Veraschung
8.5mm	600°C 1100°F	1700°C 3100°F	500mm 19,7"	S,K, -	-	Standard	X	-	X / -	(X)*	-
8.5mm	600°C 1100°F	1700°C 3100°F	1100mm 39.4"	R,S,B	M16 fine pitch	Standard	-	X	- / X	X	-
25mm	600°C 1100°F	1700°C 3100°F	1000mm 39.4"	R,S,B	1"	Standard	-	X	-	X	- / X
15mm	600°C 1100°F	1700°C 3100°F	1100mm 43"	R,S,B	3/4"	Standard	-	X	X	-	- / X

25mm	600°C 1100°F	1150°C 2100°F	1300mm 51.2"	-, S, K, N	1"	Lemo	-	X	-	(X)*	X / -
25mm/1" 35mm/1½"	600°C 1100°F	1150°C 2100°F	1200mm 47.2"	-, S, K, N	1" or 1" ½	Lemo	-	X	-	(X)*	X / (X)*
25mm	600°C 1100°F	1150°C 2100°F	1300mm 51.2"	-, S, K, N	1"	Standard	-	X	-	(X)*	X / -
25mm	600°C 1100°F	1150°C 2100°F	1000mm 39.4"	-, S, K, N	1"	Standard	-	X	-	(X)*	X / -

*Possible under certain condition (contact us for more information)